




⑥	--	Ethoxyline resin black	3	g
⑤	--	Nut 18*2.8mm 1/4-18NPT Stainless steel 316F	1	PC
④	--	Shell 18.0*18.0mm 1/4-18NPT Stainless steel 316F	1	PC
③	--	Black Fluorine rubber ring $\phi 11*2.0$ mm	1	PC
②	--	M12 A Coding 4pin female rear mount connector	1	PC
①	--	22AWG Hook up wire	AR	M
No.	Part No.	DESCRIPTION	Q'TY	UNIT

REV	ECN	DATE	DESCRIPTION

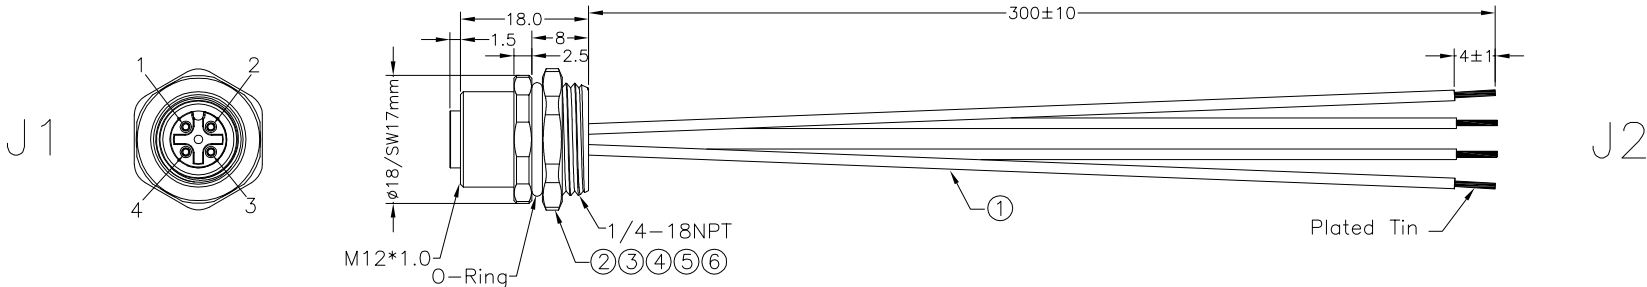

DETAIL A
LABEL DETAIL A NOTE:
1.Material:Art paper.
2.Black texts with white background.
3.Text Height 3.0mm Max,Font”Arial”



Electrical Character:
Rating voltage: 250V AC/DC
Insulation resistance: >100MΩ
Rating current: 4A
Contact resistance: ≤5mΩ

General Information:
Standard: IEC 61076-2-101
Connector Body: PA66+GF
Contacts: Phosphorus copper with Gold plating
Connector Locking System: Screw-locking
Waterproof Rating: IP67/IP68
ALL MATERIALS ARE COMPLIANT WITH ROHS OR REACH

Electrical Performance:
1.100%TESTED FOR OPENS SHORTS
2.INSULATION RESISTANCE: 5M ohm
3.CONNECTING RESISTANCE: 5 ohm
4.HI-POT:DC 300V 10ms

Pin Out

J1	COLOR	J2
1	BROWN	OPEN
2	WHITE	
3	BLUE	
4	BLACK	

THIS DRAWING AND THE INFORMATION THERE IN IS THE PROPERTY OF THE MUELLER ELECTRIC COMPANY AND MAY BE USED SOLELY FOR THE PROPOSE FOR WHICH IT IS SUBMITTED. IT IS TO BE TREATED IN CONFIDENCE. IT MAY NOT BE CIRCULATED, REPRODUCED OR DIVULGE TO OTHER PARTIES WITHOUT WRITTEN CONSENT OF MUELLER ELECTRIC INC. IT MUST BE RETURNED UPON REQUEST.

VENDOR BLOCK

THE VENDOR LISTED BELOW AGREES TO PROVIDE MUELLER ELECTRIC INC. WITH THE AGREED PRODUCT TO THE SPECIFICATIONS OF THIS PRINT. NO CHANGES WILL BE MADE WITHOUT THE APPROVAL OF MUELLER ELECTRIC INC.

COMPANY: _____

REP: _____

TITLE: _____

DATE: _____

MUELLER ELECTRIC CO.
2850 Gilchrist Rd. Akron, Ohio 44305

APPROVED BY: _____

DRAWN BY: Ruby_zhang

EDITED BY: _____

FILE: _____

PART NUMBER: AI-T00204-300

DESCRIPTION: AI-T00204-300

TOLERANCE: X.X = ±0.1 X.XX = ±0.01 X.XXX = ±0.005 X' = ±0.5

DRAWING NUMBER: _____

REV: _____

SHEET NO. 1/1